


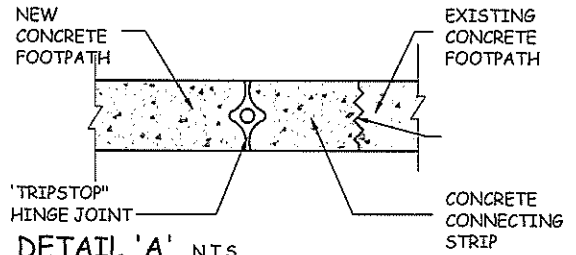


### LEGEND

-  DENOTES 'TRIPSTOP' HINGE JOINTS (OR APPROVED ALTERNATIVE) AT TYPICAL 1200 CENTRES. MINIMUM FIVE JOINTS OR EXTEND ONE FULL PANEL PAST DRIP-LINE OF MATURE TREE
-  DENOTES GRAVEL BEDDING. GRAVEL BED TO EXTEND 200mm PAST EDGE OF FOOTPATH (U.N.O)
-  DENOTES NATURE STRIP




**DETAIL 'A'** N.T.S.  
 PREFERRED CONNECTION TO EXISTING PATH TO ALLOW FUTURE EXPANSION OF ARTICULATED JOINT SYSTEM

**NOTES:**

1. GRAVEL BED TO EXTEND MINIMUM 1m PAST DRIP-LINE OF TREE AND MINIMUM 200mm EITHER SIDE OF PATH.
2. FOR NEW DEVELOPMENTS, STREET TREE LOCATION/PLANTINGS TO BE CONFIRMED BEFORE PATH CONSTRUCTION.
3. FOR LOCATIONS WITH EXISTING STREET TREES, ARBORIST TO BE CONSULTED TO CHECK ROOT SYSTEM BEFORE INSTALLATION OF PATH. ROOT TRIMMING OR PRUNING IS ONLY TO BE CONSIDERED AS A LAST OPTION.
4. STANDARD DOES NOT APPLY TO HIGHLY SIGNIFICANT TREES. CONTACT COUNCIL'S COORDINATOR FOR ARBORICULTURE SERVICES ON 9518 3726 FOR REQUIREMENTS AT THESE LOCATIONS.
5. MATERIAL FOR GRAVEL BED TO BE NOMINAL 5mm ROUNDED STONE/GRAVEL, UNIFORMLY GRADED.
6. REFER COM STD DWG C1 FOR STANDARD FOOTPATH DETAILS AND STD DWG C1 AND C7 FOR EXPANSION JOINT REQUIREMENTS.
7. ALL DIMENSIONS IN MILLIMETRES (U.N.O)

### PLAN

SCALE 1:100

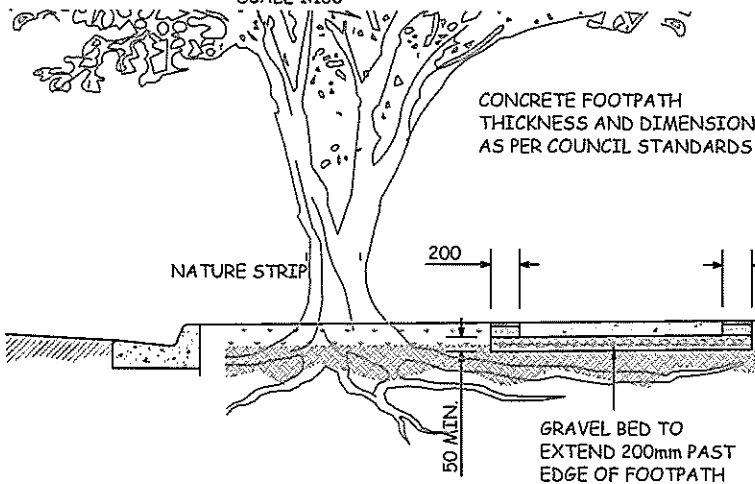

### SECTION A-A

SCALE 1:50

# CITY OF MONASH



## PROVISION FOR TREE ROOTS UNDER CONCRETE PATHS

DIRECTOR INFRASTRUCTURE:

DRAWN:  
W.Du Feb 2011

SCALE: N.T.S.

SHEET:  
C09

DWG NAME:  
STDWG C09

21500

REV: C JUN15